


Document Title: <b>Engine, description</b>	Function Group: <b>200</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>			

## Engine, description

The engine is a 4-cylinder, 4-stroke, direct injected, turbocharged, aftercooled with a cast iron block and cylinder head. Gears in the engine gear case are hardened helical type for strength and reduced noise, arranged to provide quiet, smooth transmission of power.

The cylinder block and head are designed with internal passages forming galleries for both lubricating oil and coolant. The fan belt is a poly type V-belt for improved performance and an auto tension adjuster maintains belt tension.

### Starter side view (step 1)

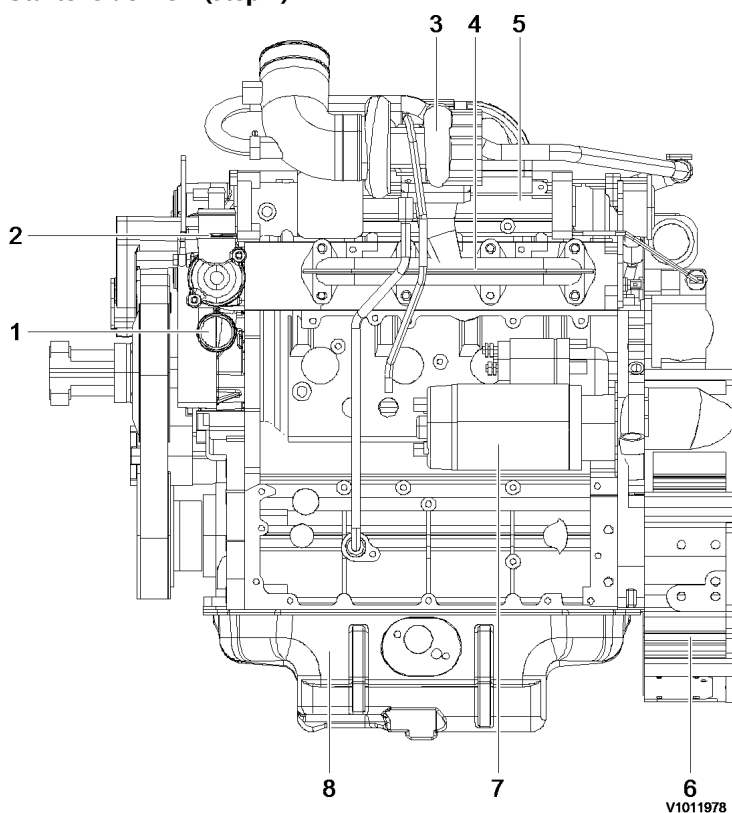


**Figure 1**

### Engine, starter side view (step 1)

1. Coolant inlet
2. Coolant outlet
3. Exhaust turbocharger
4. Exhaust manifold
5. Air intake manifold
6. Flywheel housing
7. Starter
8. Oil pan


### Starter side view (step 2)

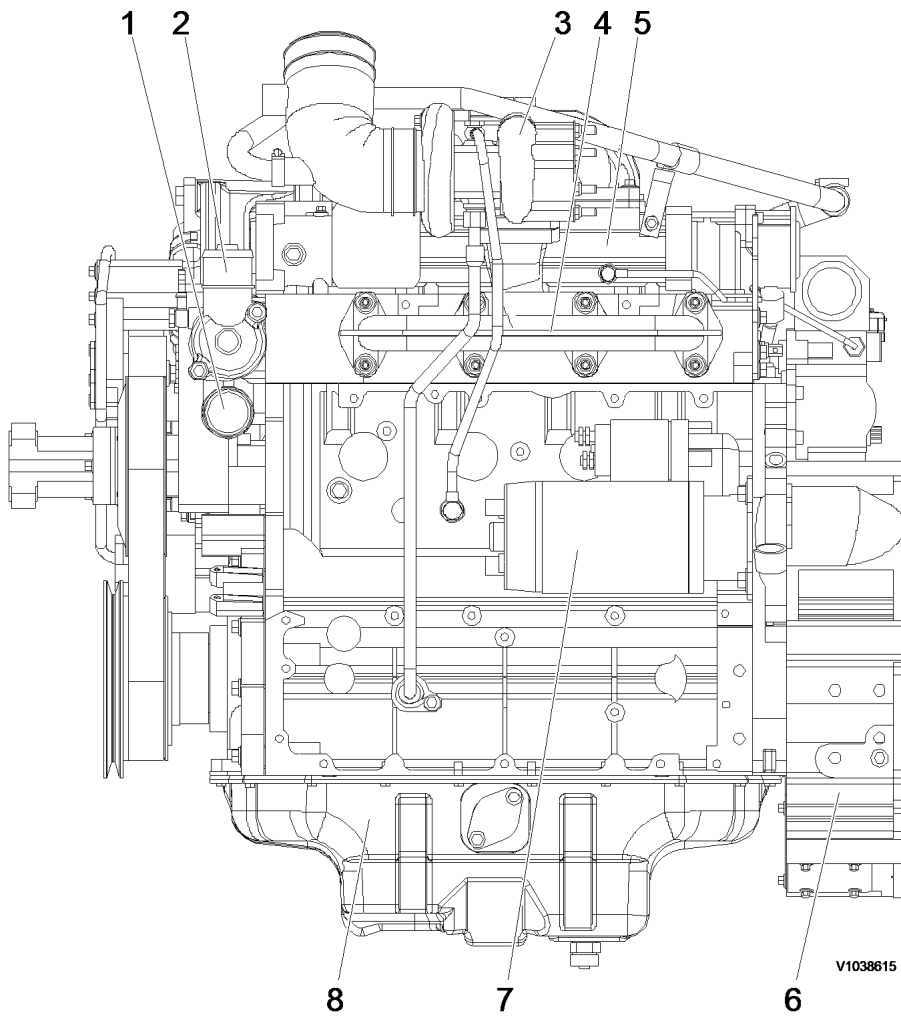

**Figure 2**  
**Engine, starter side view (step 2)**

1. Coolant inlet
2. Coolant outlet
3. Exhaust turbocharger
4. Exhaust manifold
5. Air intake manifold
6. Flywheel housing
7. Starter
8. Oil pan


**Alternator side view (step 1)**

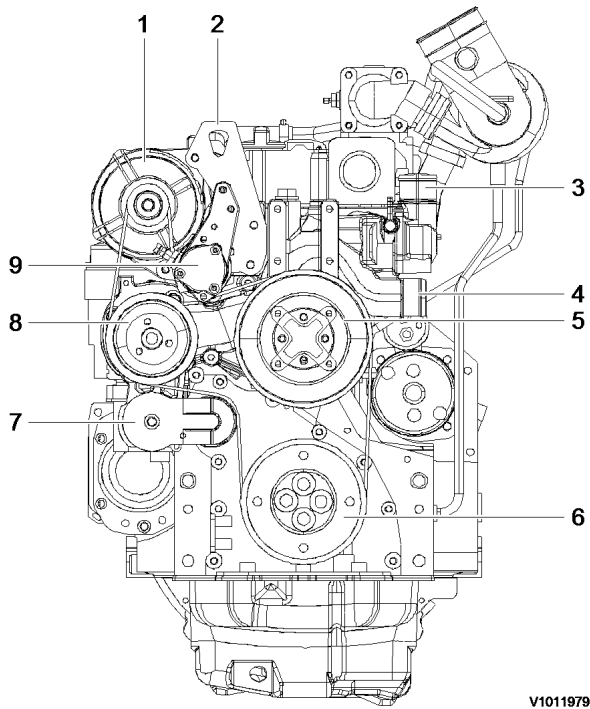

**Figure 3**  
**Engine, Alternator side view (step 1)**

1. Alternator
2. Engine lifting bracket
3. Coolant outlet
4. Coolant inlet
5. Fan pulley
6. Poly - V-pulley with vibration damper
7. Poly - V-belt tension pulley
8. Coolant pump
9. Fuel pump

**Alternator side view (step 2)**

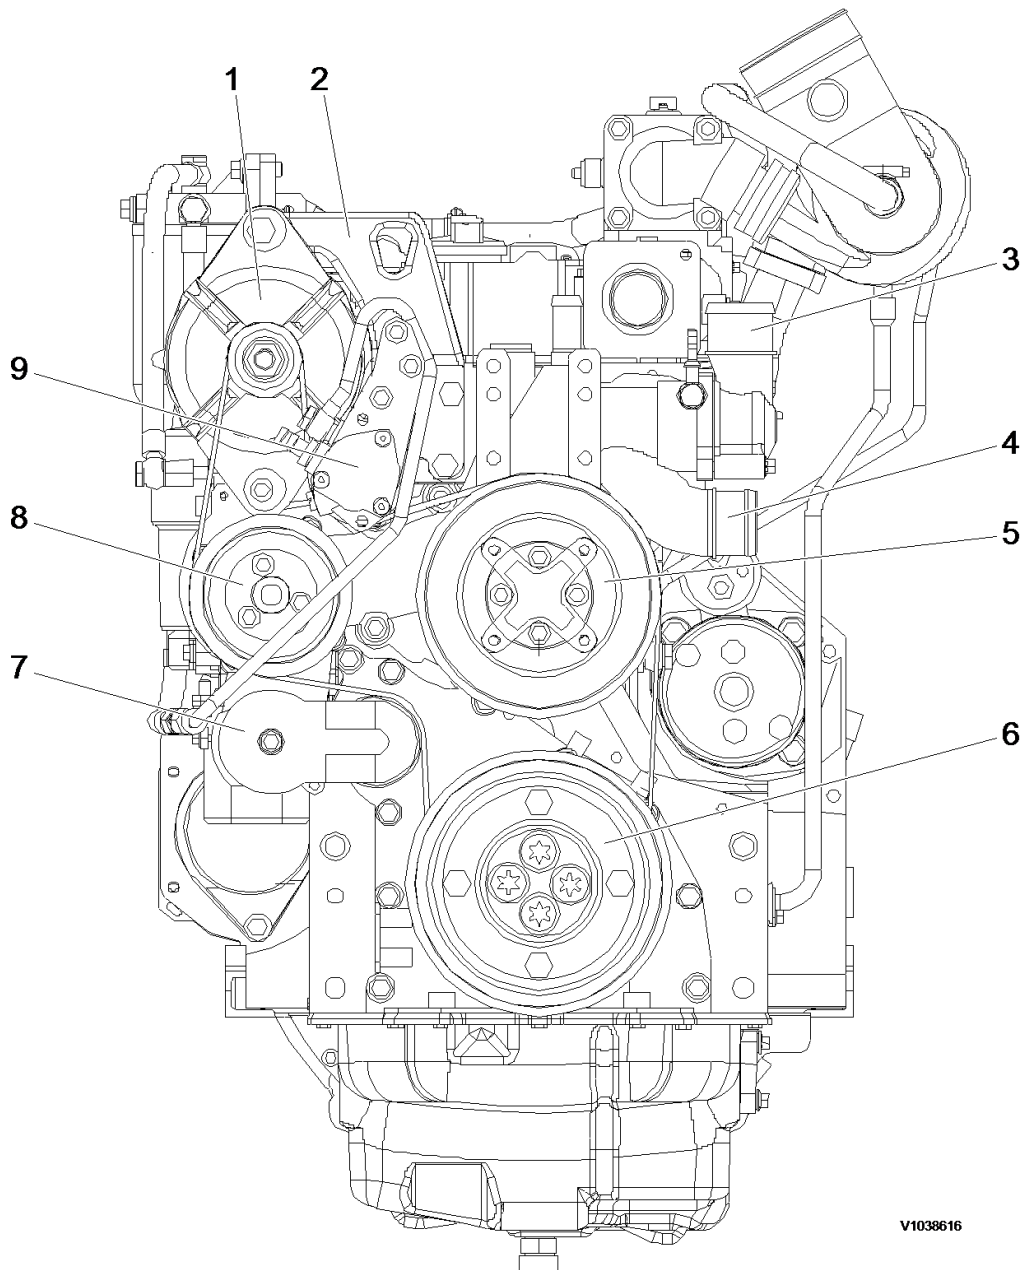


V1038616

**Figure 4**  
**Engine, Alternator side view (step 2)**

1. Alternator
2. Engine lifting bracket
3. Coolant outlet
4. Coolant inlet
5. Fan pulley
6. Poly - V-pulley with vibration damper
7. Poly - V-belt tension pulley
8. Coolant pump
9. Fuel pump

**Top view (step 1)**

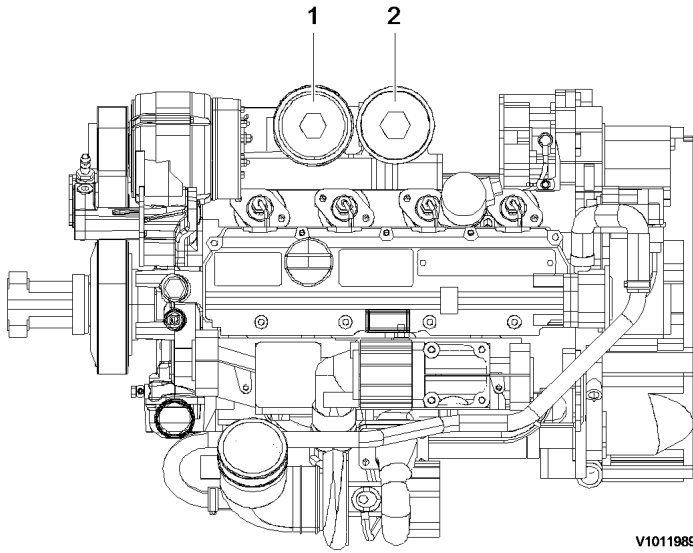


V1011989

**Figure 5**  
**Engine, top view (step 1)**

1. Engine oil filter
2. Fuel filter

**Top view (step 2)**

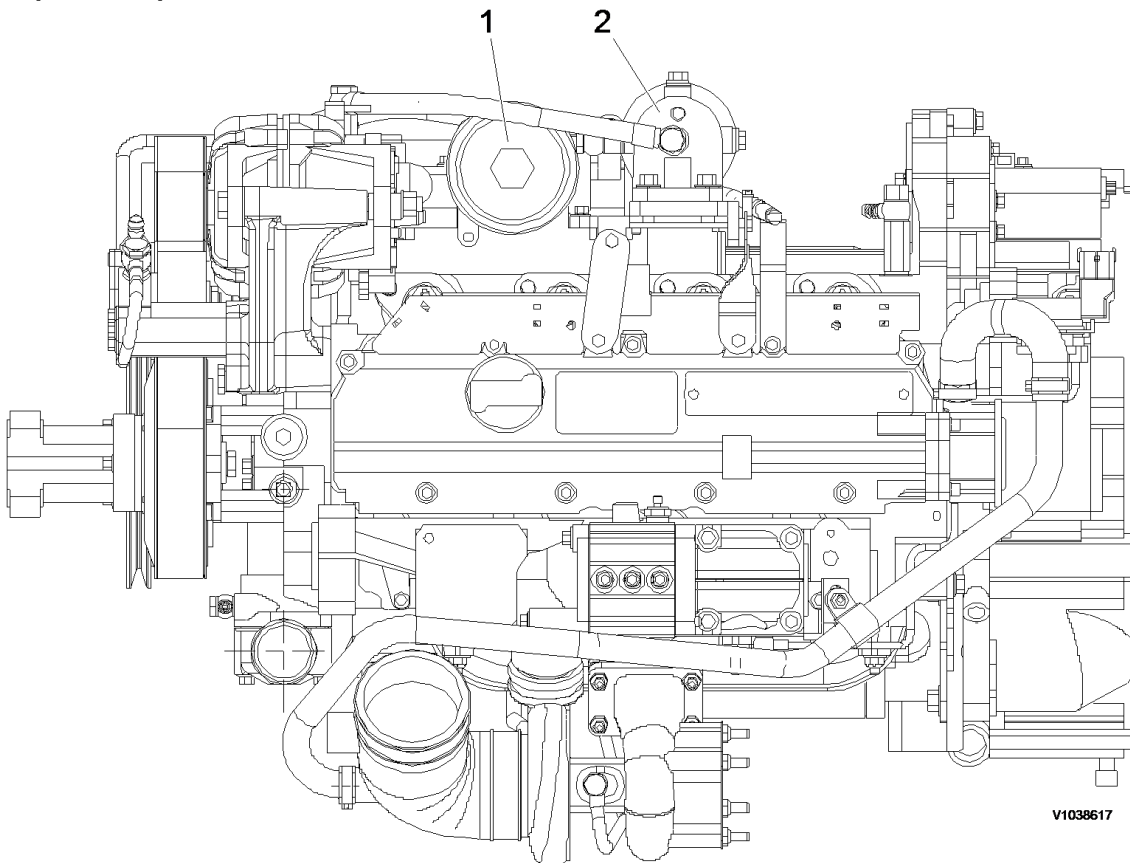


V1038617

**Figure 6**  
**Engine, top view (step 2)**

1. Engine oil filter
2. Fuel filter

**Fuel filter side view (step 1)**

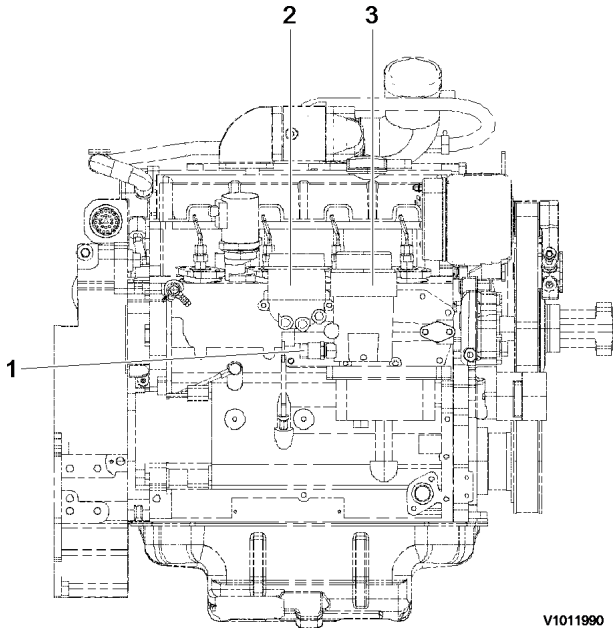


**Figure 7**

**Engine, fuel filter side view (step 1)**

1. Lube oil pressure port (M14 × 1.5)
2. Fuel filter
3. Engine oil filter

**Fuel filter side view (step 2)**

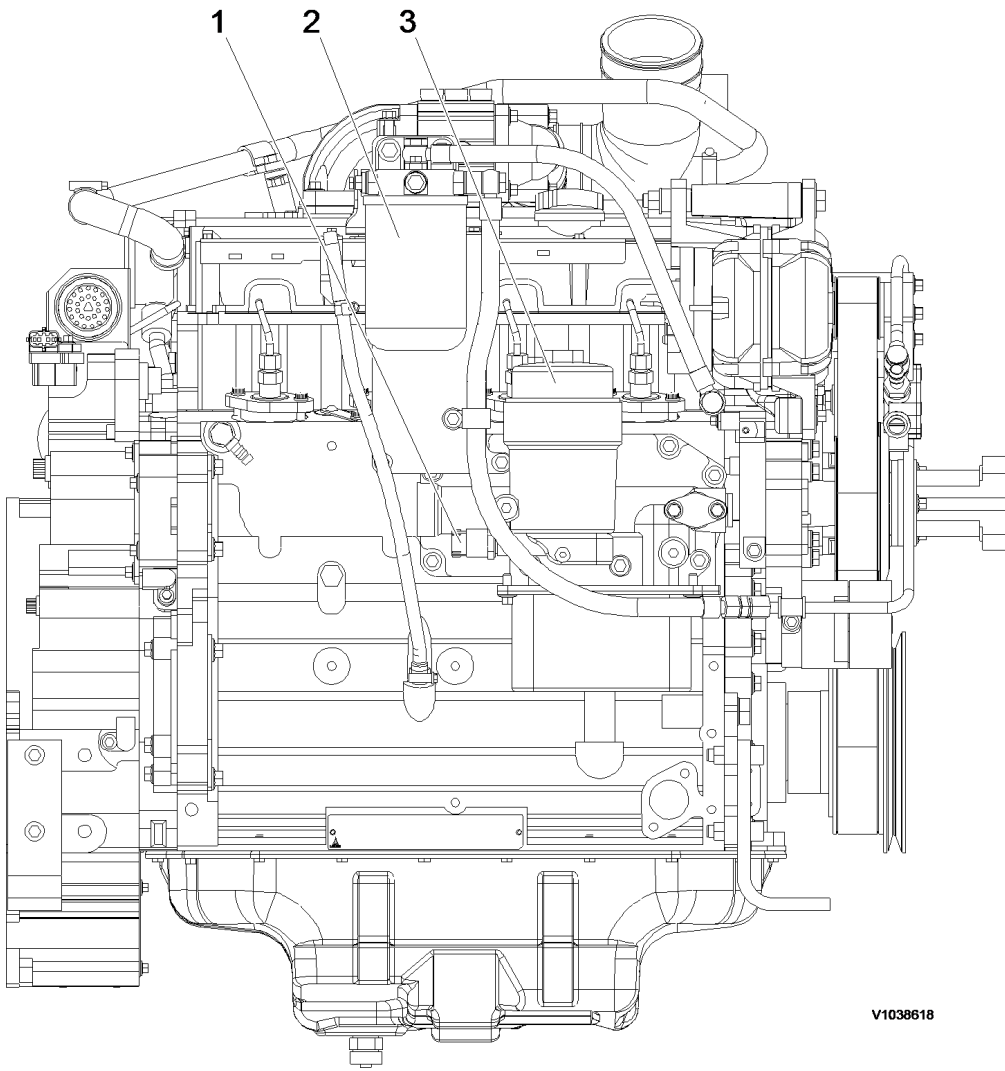


V1038618

**Figure 8**  
**Engine, fuel filter side view (step 2)**

1. Lube oil pressure port (M14 × 1.5)
2. Fuel filter
3. Engine oil filter

**Flywheel end view (step 1)**

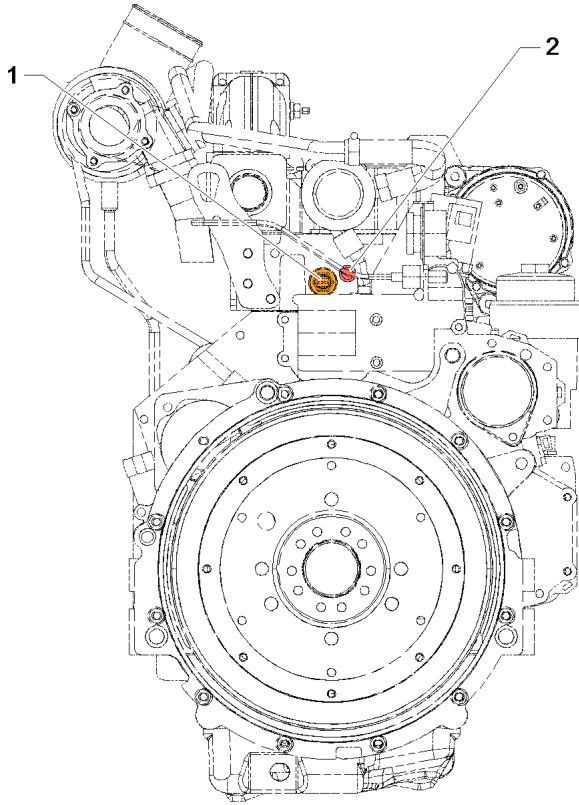


V1011991

**Figure 9**  
**Engine, flywheel end view (step 1)**

1. Coolant temperature check port
2. Coolant temperature sensor port

**Flywheel end view (step 2)**



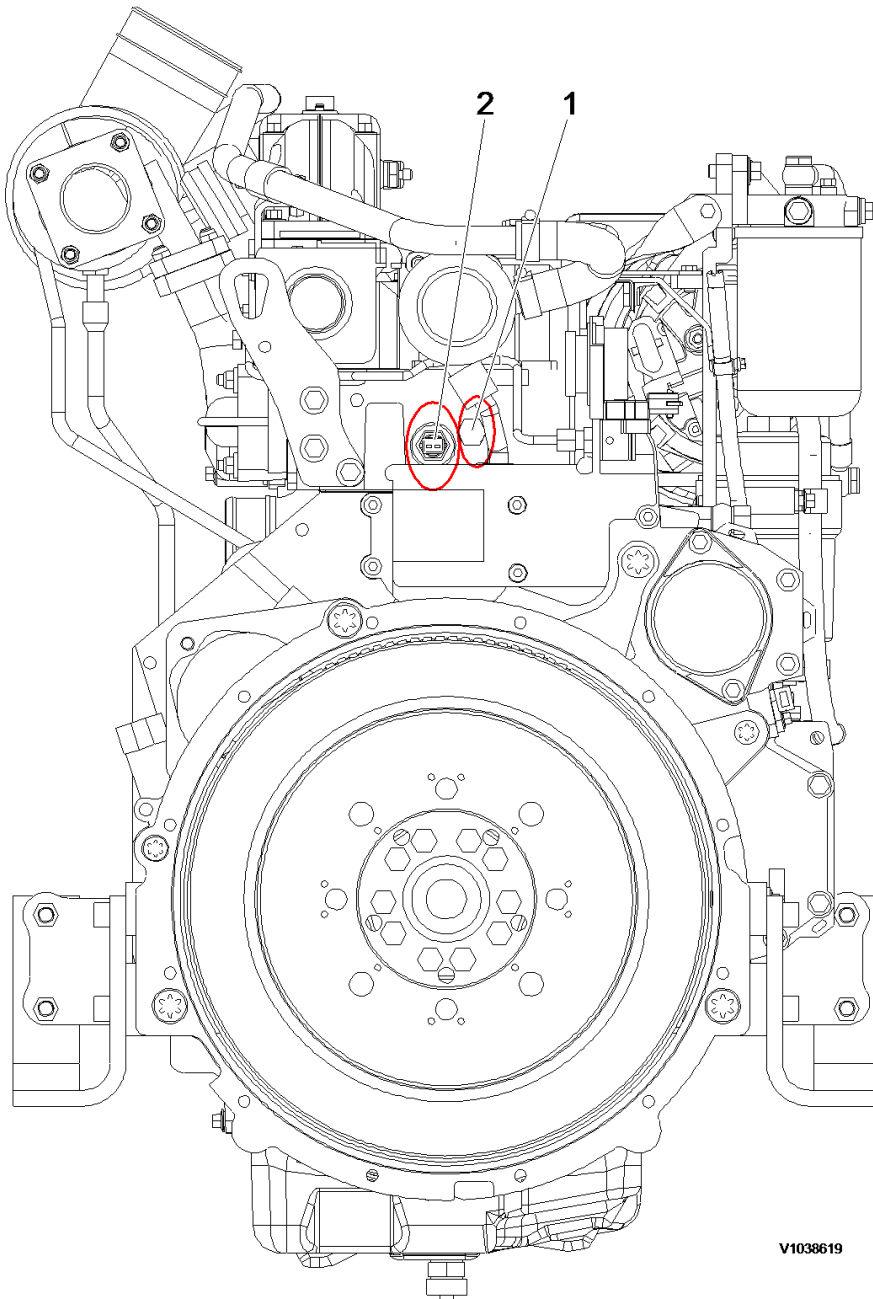

V1038619

**Figure 10**  
**Engine, flywheel end view (step 2)**

1. Coolant temperature check port
2. Coolant temperature sensor port

Document Title: <b>Valves, adjusting</b>	Function Group: <b>214</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>			

## Valves, adjusting

Op nbr 21412


The valve clearance must be checked and adjusted at specified intervals. To do this, the engine oil temperature must be between 20 °C (68 °F) and 80 °C (176 °F).

### Valve clearance adjustment

Item	mm	inch
Inlet valve	0.3	0.012
Exhaust valve	0.5	0.020


### Adjustment

1. Remove rocker cover.

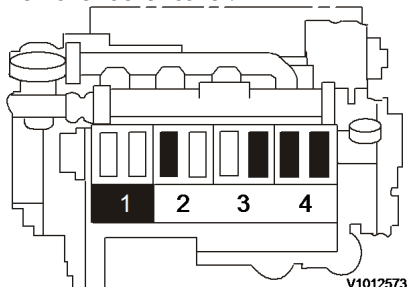

**Figure 1**  
**Adjustment, valve clearance**


2. Turn crankshaft until both valves in cylinder 1 overlap (exhaust valve about to close, inlet valve about to open).
3. Adjust clearance of valves marked in black in figure. Mark respective rocker arm with chalk to show that adjustment has been done.
4. Turn crankshaft one full revolution (360°). Now adjust clearance of valves marked black in figure.

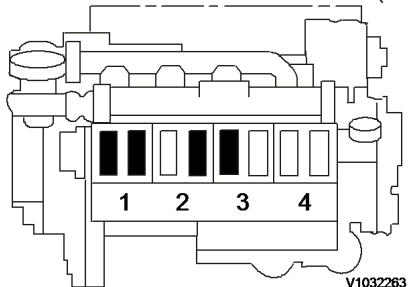

**Figure 2**  
**Adjustment, valve clearance**

Document Title: <b>Camshaft and timing gears, description</b>	Function Group: <b>215</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>			

## Camshaft and timing gears, description

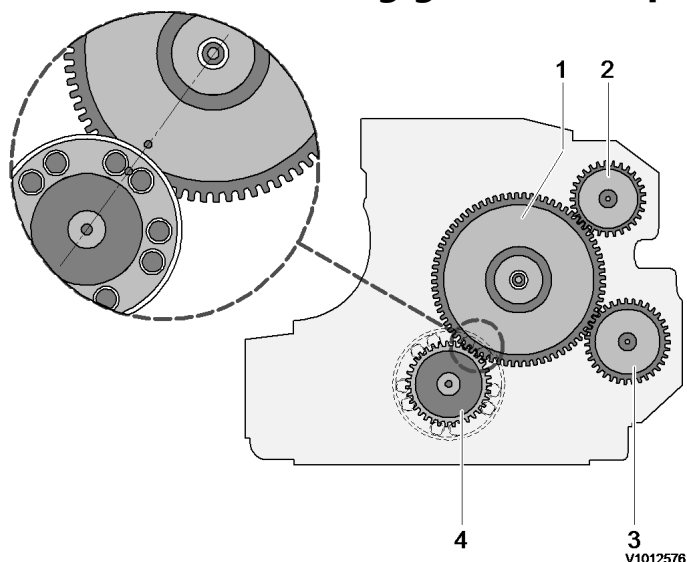

**Figure 1**  
**Camshaft and timing gears**

1. Camshaft gear with marking
2. PTO, e.g. hydraulic pump
3. PTO, e.g. air compressor
4. Crankshaft gear with markings

### Camshaft

- The camshaft is mounted on 5 bearings. The running surfaces of bearings and cams are induction-hardened.
- Each bearing runs in a bearing bushing pressed into the crankcase. There is one inlet, exhaust and injection pump cam per cylinder. The axial stop for the camshaft is located in the timing chest cover.

### Timing gears

- The timing gears are arranged on the flywheel end. Gears for the auxiliary drive of the air compressor are clearance-optimized. The drive:
  - Camshaft (injection pumps and valve gear)
  - 1st PTO (hydraulic pumps)
  - 2nd PTO (air compressor)

Crankshaft flange and camshaft gear are marked for setting the engine timing.

Marking on the crankshaft flange in the tooth gap.


Marking on the camshaft gear on the tooth.

As already mentioned, the balancing shafts are located by pins (special tool) in the crankcase for assembly.

Document Title: <b>Crankshaft, description</b>	Function Group: <b>216</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>			


## Crankshaft, description

- The forged crankshaft of the D4D engine is provided with integrated balance weights. The drive gear for the timing gears and the flywheel flange are shrunk on.

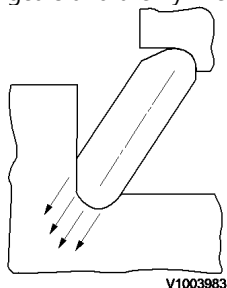


**Figure 2**  
**Fillet radii on the bearing journal**

- The material microstructure of the fillet radii on the bearing journals is strengthened by rolling.
- Remachining of the fillet radii is therefore not permissible.

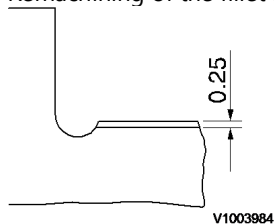

**Figure 3**  
**Allowable repair limit**

- In case of repair, there is available one undersize of 0.25 mm (referred to the diameter) for the crank pins and main bearing journals.

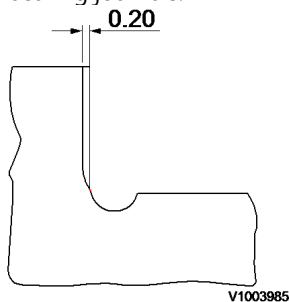


**Figure 4**  
**Allowable thrust bearing face repair limit**

- The thrust bearing face can only be remachined once (oversize: 0.4 mm, 0.2 mm each side).  
Thrust bearing clearance of the crankshaft in installed condition: 0.1 to 0.28 mm (0.004 to 0.011 in).

Document Title: <b>Connecting rod, description</b>	Function Group: <b>rod, 216</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>			

## Connecting rod, description

- The connecting rod of forged steel is fitted at the big end bearing bore with a balance weight (1) in order to compensate the manufacturing tolerances with regard to weight and position of the center of gravity.
- The number markings (A) on the big end eye and the bearing cap must be on one side and identical.
- Locating lugs (2) are provided in the lower and upper bearing shells to prevent the bearing shells from rotating in their seat; these lugs engage in oblong shaped grooves in the big end eye and big end bearing cap.
- The piston must be so installed that the flywheel symbol (B) on the piston top faces the flywheel.
- When assembling connecting rod and piston, the centering pins (3) for locating the connecting rod bearing cap must be fitted on the upper face of the piston on the side of the flywheel symbol (B).

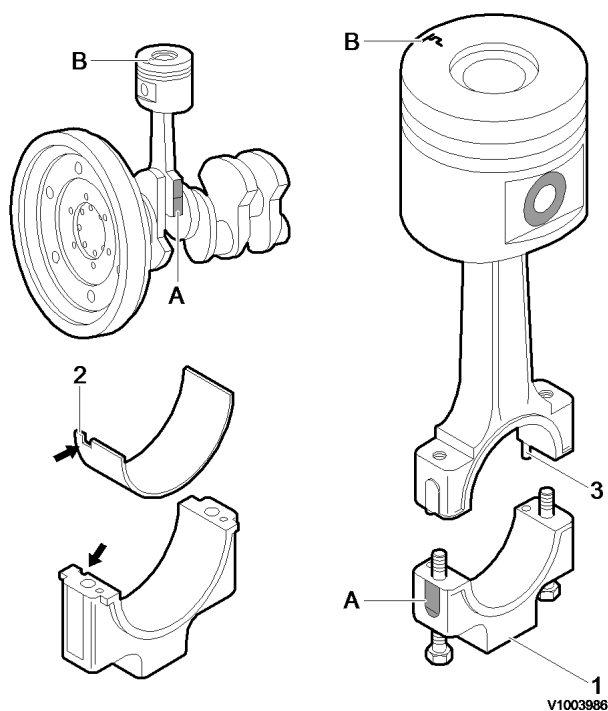


**Figure 1**  
**Connecting rod**

Document Title: <b>Engine mounting</b>	Function Group: <b>218</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>			


## Engine mounting

Front fan end view

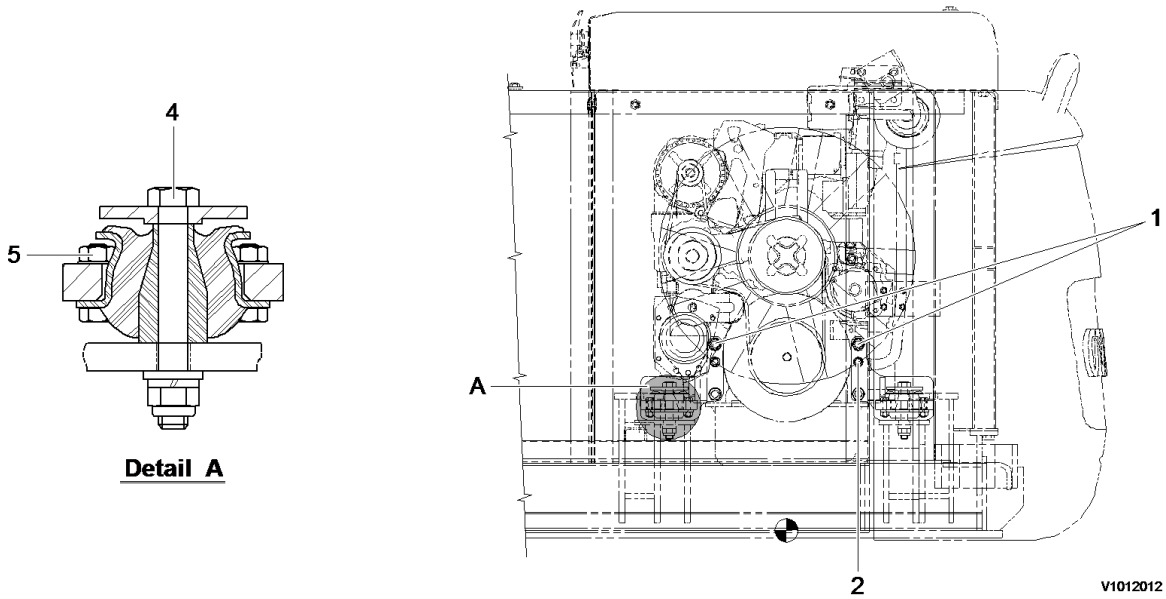

**Figure 1**  
Engine mounting, front-fan end view

Flywheel end view

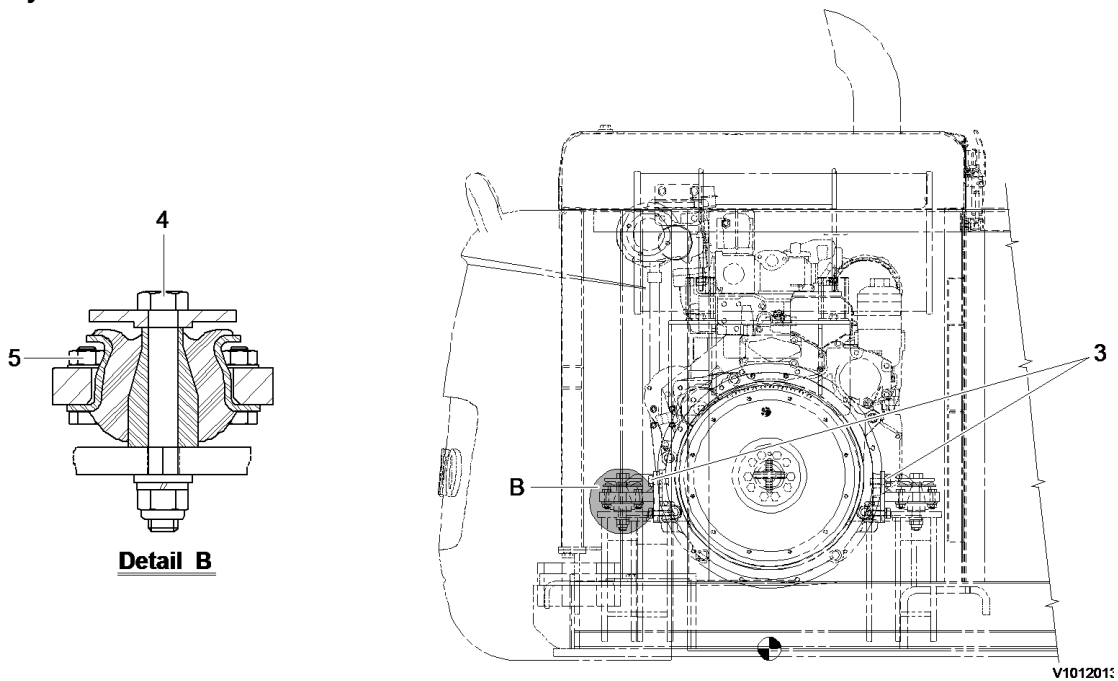

**Figure 2**

## Engine mounting, rear-flywheel end view

### NOTE!

Check the color markings for cushion installation.

Front (fan end) – Blue marking

Rear (flywheel end) – Beige marking

### Tightening torque, unit: kgf·m (lbf·ft)

No.	Mounting position	Tightening torque
1	Engine mounting bracket (front)	26 ± 2 (188 ± 14)
2		11.5 ± 0.5 (83 ± 4)
3	Engine mounting bracket (rear)	11.5 ± 0.5 (83 ± 4)
4	Engine mounting cushion	14 ~ 15 (101 ~ 108)
5		6 ~ 7 (43 ~ 51)

### NOTE!


Apply loctite to engine mounting bracket screws (front, rear).

Document Title: <b>Lubrication description</b>	system, 220	Function Group: <b>220</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>				

## Lubrication system, description

- Engine lubricating oil is supplied to the contact faces of rotating components such as turbocharger, crankshaft, camshaft, piston, inlet/exhaust valve, rocker arm and timing gear by means of forced lubrication from the oil pump.

### Lubrication oil flow diagram

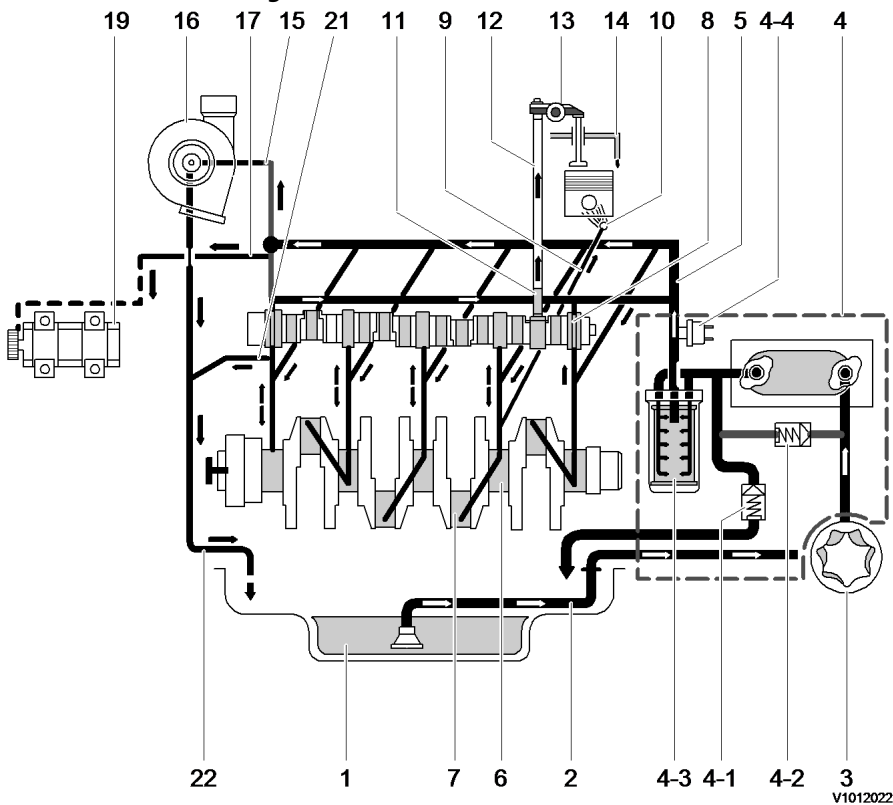

**Figure 1**  
**Lubrication oil flow**

1	Oil pan	11	Tappet control bore for lubrication of rocker arms
2	Intake pipe	12	Push rod, oil supply for rocker arm
3	Lube oil pump	13	Rocker arm
4	Lube oil cooler housing	14	Return line to oil pan
4-1	Pressure regulator valve: $4.1 \pm 0.4 \text{ kgf/cm}^2$ (58 ± 6 psi)	15	Oil line to exhaust turbocharger
4-2	Cooler bypass valve: $2.1 \pm 0.35 \text{ kgf/cm}^2$ (30 ± 5 psi)	16	Exhaust turbocharger
4-3	Lube oil filter with bypass valve: $2.5 \pm 0.5 \text{ kgf/cm}^2$ (36 ± 7 psi)	17	Oil line to compressor or to hydraulic pump
4-4	Oil pressure sensor	19	Hydraulic pump
5	Main oil passage	21	Return to oil pan
6	Crankshaft bearing	22	Return line from turbocharger




7	Big end bearing		
8	Camshaft bearing		
9	Bore for piston cooling spray nozzle		
10	Spray nozzle for piston cooling		

**Schematic, lube oil circuit**

**Specifications**

Item	Description	Remark
1	Lube oil pump	Rotary pump: Volume flow at n = 2500 min <sup>-1</sup> : 65 l/min
2	Oil cooler	
3	Bypass valve	Opening pressure: p = 2.1 ± 0.35 kgf/cm <sup>2</sup> (30 ± 5 psi)
4	Oil filter	With bypass valve (5)
5	Bypass valve	Opening pressure: p = 2.5 ± 0.5 kgf/cm <sup>2</sup> (36 ± 7 psi)
6	Pressure regulating valve	Opening pressure: p = 4.0 ± 0.4 kgf/cm <sup>2</sup> (57 ± 6 psi)
7	Exhaust turbocharger	

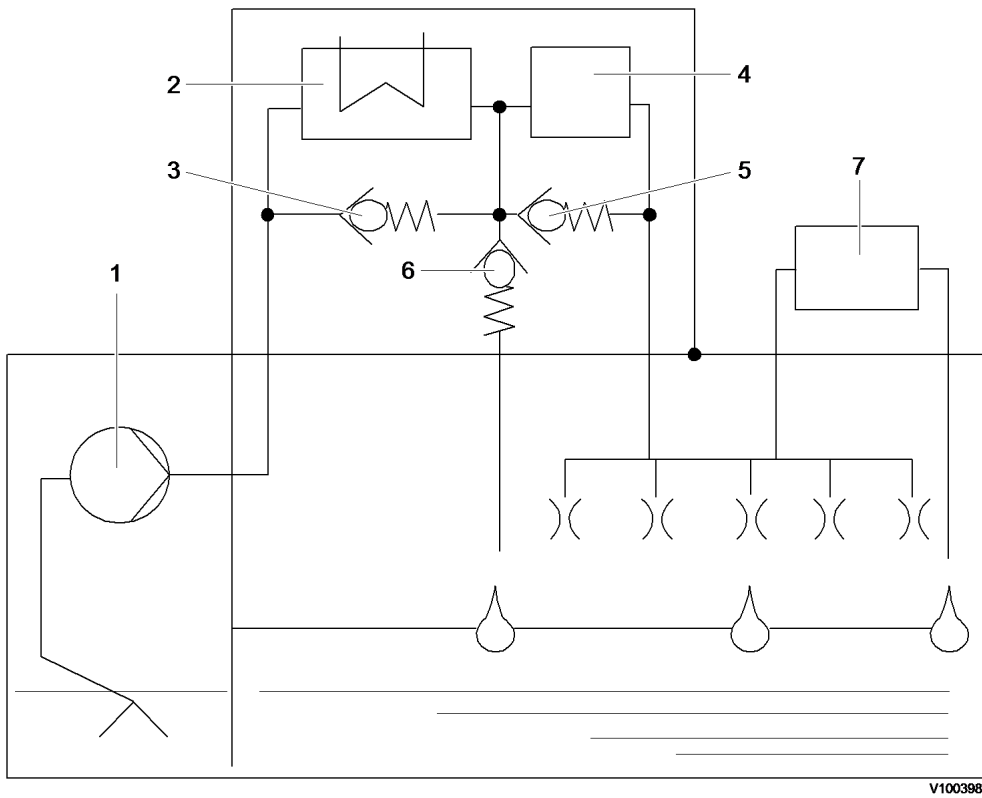

**Figure 2**  
**Schematic, lube oil circuit**

Document Title: <b>Lubrication system, principle of operation</b>	Function Group: <b>220</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>			

## Lubrication system, principle of operation

### Lube oil ducts


The D4D engine is provided with forced-fed circulation lubrication with lube oil cooler and lube oil filter arranged in full flow. The lube oil is supplied by the lube oil pump through the oil cooler to the oil filter. Both components are mounted to the lube oil cooler housing which is flanged to the crankcase. Downstream of the filter the lube oil flows into the main oil passage and secondary oil passage. From here the oil is ducted to the lubricating points.

The main oil passage supplies:

- Crankshaft
- Camshaft
- Valve tappets
- Roller tappets

The secondary oil gallery supplies:

- Exhaust turbocharger
- Compressor

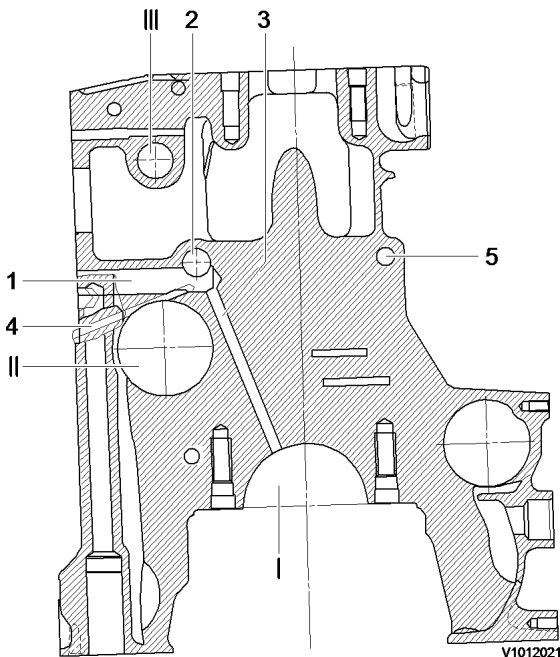


**Figure 1**  
**Lube oil duct, sectional view**

1	From oil filter	I	Crankshaft bearing
2	Main oil passage	II	Camshaft bearing
3	Oil duct to crankshaft	III	Fuel rack guide
4	Oil duct to camshaft		
5	Secondary oil passage		

Lubrication of the rockers is effected via the tappets and the push rods.

### Lube oil pump

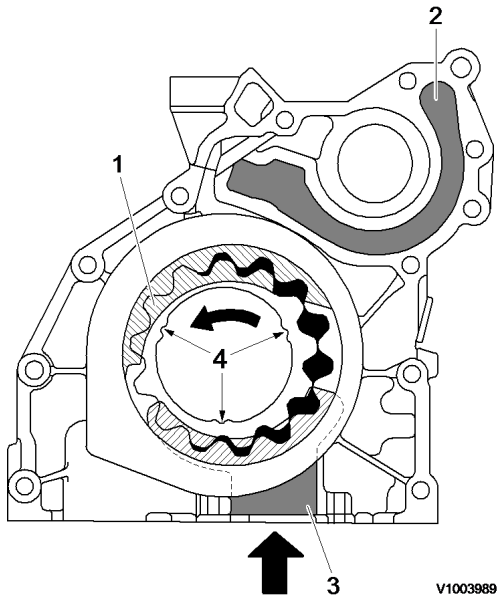

**Figure 2**  
**Lube oil pump, sectional view**


1. Inner rotor
2. Delivery chamber towards crankcase
3. Suction chamber
4. Driver contour

The lube oil pump rotary pump is installed in the front cover. The inner rotor (1) is seated on the crankshaft and is driven by same.

Its driver contour (4) has no 120° partition, i.e. the rotor can only be slid onto the crankshaft in a specific position. This is attributable to deviating rotor widths.

	Unit	Specification
Rotor width	mm (in)	12.3 (0.48)
Volume flow	l/min	65 at 2500 rpm

Minimum oil pressure at 120°C (248°F) oil temperature, measured at oil filter bracket.

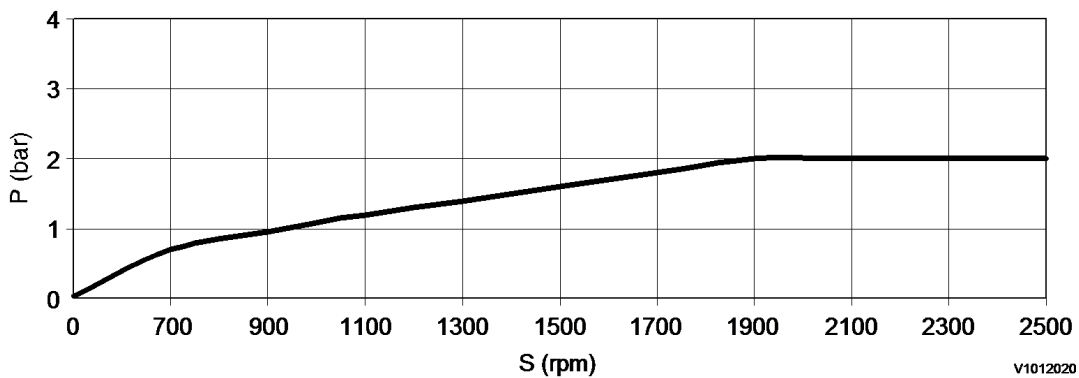

**Figure 3**  
**Lube oil pump, characteristic curve**


P	Oil pressure
S	Speed

**Lube oil cooler housing**

The oil cooler housing incorporates the oil cooler, the oil filter and the pressure relief valve of the lube oil circuit.

**Lube oil cooler housing**

Item	Description	Remark
1	Oil filter	Consisting of: filter housing, filter cover, filter element. Tightening torque of cover = 25 N-m
2	Bypass valve	Opening pressure: $p = 2.5 \pm 0.5$ bar
3	Drain valve	Opens when filter cover is loosened by 1 to 2 turns. The oil in the filter housing drains into the oil pan.
4	Bypass valve	Protects cooler from pressure peaks. Opening pressure: $p = 2.1 \pm 0.35$ bar
5	Pressure regulating valve	Opening pressure: $p = 4.0 \pm 0.4$ bar
6	Non-return valve	Prevents draining of the oil circuit when engine is not running. Opening pressure max. 0.12 bar
7	Oil cooler	Aluminium shell-type cooler
8	Passage water	Between oil cooler housing and oil cooler
9	Passage oil	Between oil cooler housing and oil cooler

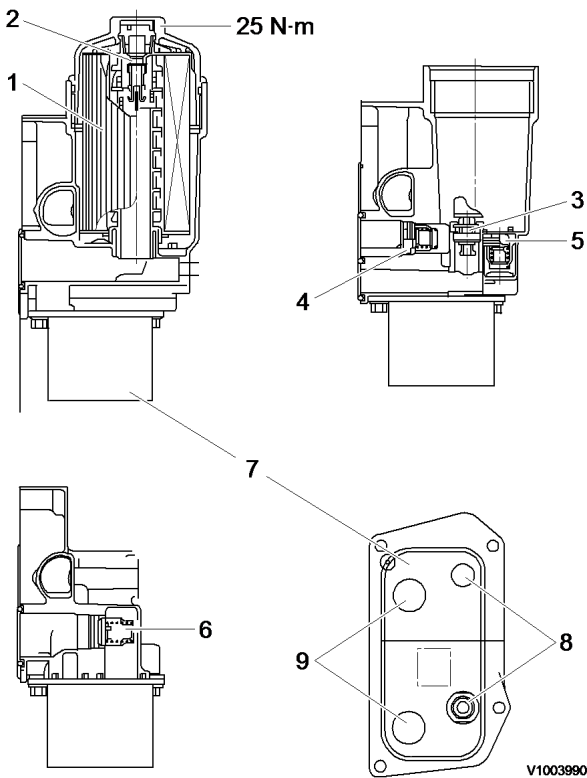

**Figure 4**  
**Lube oil cooler housing**

**Thank you very much  
for your reading.**

**Please click here and go  
back to the website.**


**Then, you can  
download the complete  
manual instantly.**

**No waiting.**

Document Title: <b>Fuel injection system, description</b>	Function Group: <b>230</b>	Information Type: <b>Service Information</b>	Date: <b>2015/3/4 0</b>
Profile: <b>EXC, EC140B LCM [GB]</b>			

## Fuel injection system, description


- The D4D engine operates according to the direct injection principle.
- The piston bowl has a small amount of eccentricity to the piston axis. The fuel is injected via four single-cylinder injection pumps. The maximum injection pressure reaches up to 1350 bar. This results in good exhaust emission values which meet the requirements of EURO I to III.

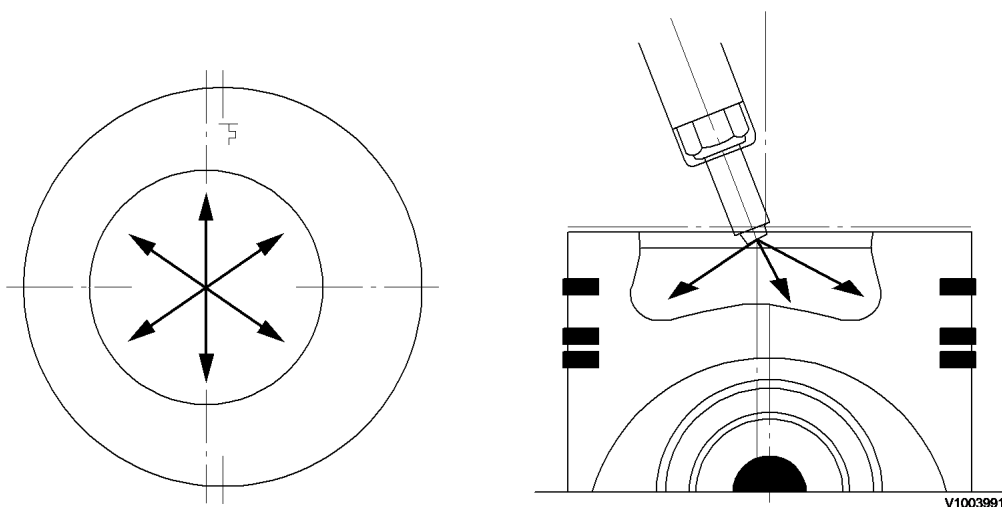

**Figure 1**  
**Diagram, fuel injection system**

### Fuel flow system diagram

The fuel is delivered by fuel feed pump (3) from tank (1) via filter (5) to the supply duct of the single-cylinder injection pumps integrated in the crankcase. From the four single injection pumps the fuel is supplied through the injection lines (8) to the injectors (9). The end of the supply duct is fitted a pressure holding valve (10).

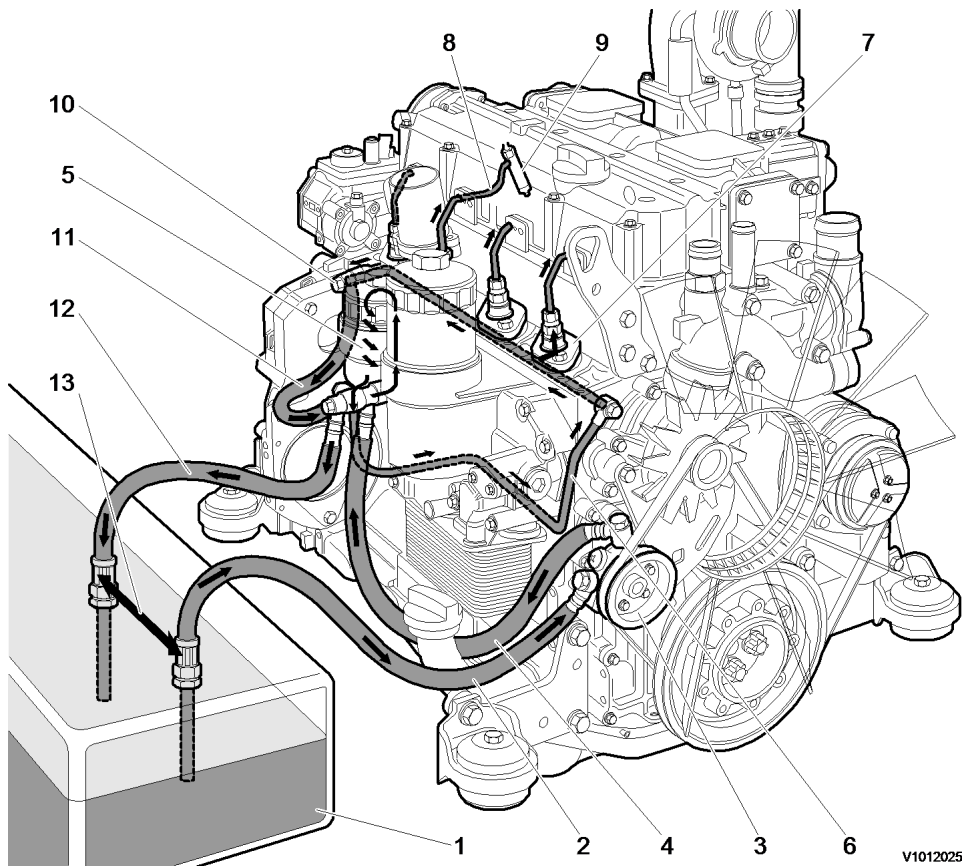

**Figure 2**  
**Diagram, fuel flow system**

1	Fuel tank	8	Line to injector
2	Line to fuel pump	9	Injector
3	Fuel pump	10	Pressure holding valve (5 bar)
4	Line to fuel filter	11	Return line to fuel filter housing
5	Fuel filter	12	Return line to fuel tank
6	Line to single injection pumps	13	Minimum distance 300 mm
7	Single-cylinder injection pump		

### Fuel feed pump

- The fuel feed pump is a rotary pump which is driven via the Poly V-belt.
- The pump is provided with a two-way valve (item 1 Pop.  $6 \pm 0.5$  bar, item 2 Pop.: 0.5 bar).
- The overpressure relief valve (1) is a plunger valve and opens at 5.5 bar. This valve simultaneously limits the system pressure to 9.5 bar.
- The bypass valve (2) is a ball valve. When the fuel lines have run empty, the fuel system can be primed with a hand pump. This prevents an excessive engine starting procedure. (starter protection).

### NOTE!

Do not reduce the line cross section and connection to the fuel feed pump (see installation directions), as this may result in engine power loss.