


# **Material Collection System (MCS) for ZTRAK Front Mowers**

Serial No. (010001-)

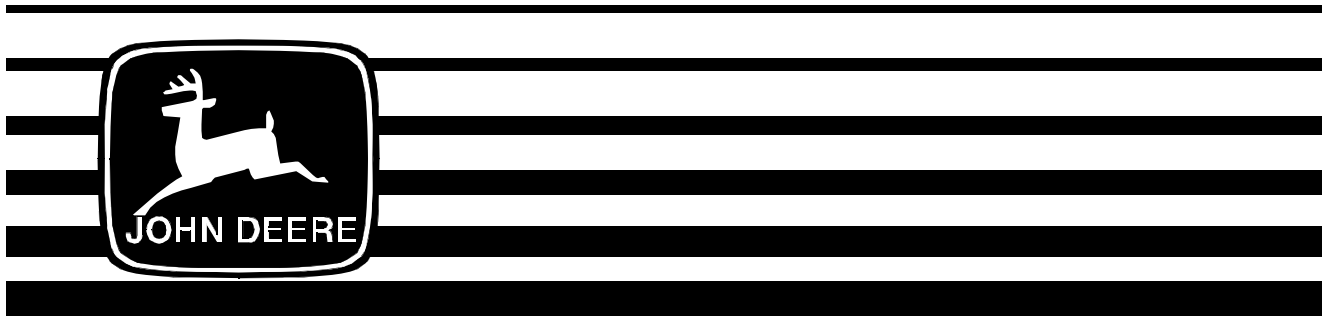

## **OPERATOR'S MANUAL**

**John Deere  
Worldwide Commercial And  
Consumer Equipment Division  
OMM133287 G8**

**North American Version  
Litho in U.S.A.  
English**

**THANK YOU** for purchasing a John Deere product.

This manual should be considered a permanent part of your machine and should remain with the machine when you sell it.

Record identification numbers below. Be sure to record all the numbers to help in tracing the machine if it is stolen. You also need to give these numbers to your dealer when you order parts.

DEALER PHONE: \_\_\_\_\_



# TABLE OF CONTENTS

---

Safety Signs.....	1
Installing .....	4
Removing.....	9
Operating Machine .....	13
Replacement Parts .....	22
Service Machine Safely .....	23
Service .....	24
Troubleshooting .....	30
Storing Machine .....	31
Assembly .....	32
Specifications .....	58
Index.....	65
John Deere Service Literature .....	69

All information, illustrations and specifications in this manual are based on the latest information at the time of publication. The right is reserved to make changes at any time without notice.

COPYRIGHT© 1998  
Deere & Co.  
John Deere Worldwide Commercial and  
Consumer Equipment Division  
Horicon, WI  
All rights reserved

OMM133287 G8

# NOTES

---


## SAFETY SIGNS

### Safety-Alert Symbol

Read and recognize safety information. Be alert to the potential for personal injury when you see this safety-alert symbol.

On your machine safety labels, the words DANGER, WARNING, and CAUTION are used with this safety-alert symbol. DANGER identifies the most serious hazards. In this manual, the word CAUTION and this symbol call attention to safety messages.


Keep safety signs in good condition. You can buy safety signs from your John Deere dealer.

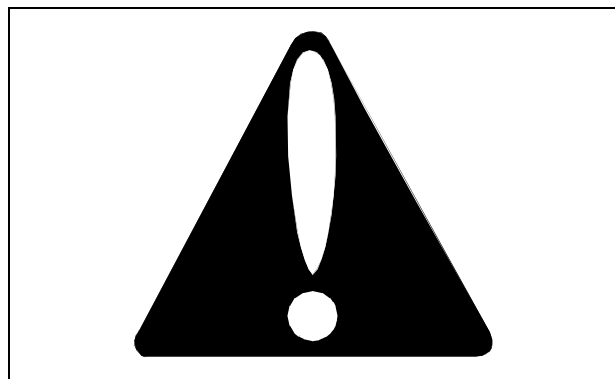

### Machine Safety Labels


#### Caution—Avoid Injury When Dumping MCS Box

To avoid injury when dumping box, shut off blower and mower. Do Not dump box without safety retention spring properly installed. Catcher assembly is subject to wear and deterioration, check frequently and replace when necessary.

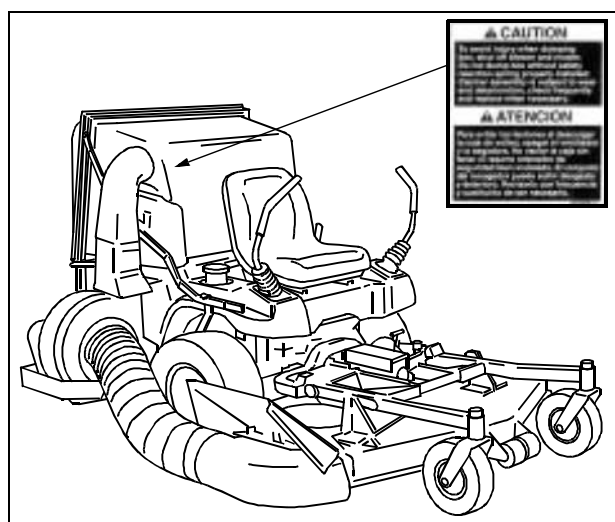

#### Warning—Avoid Injury From Crushing


To avoid injury from crushing, keep hands and fingers away from this area.

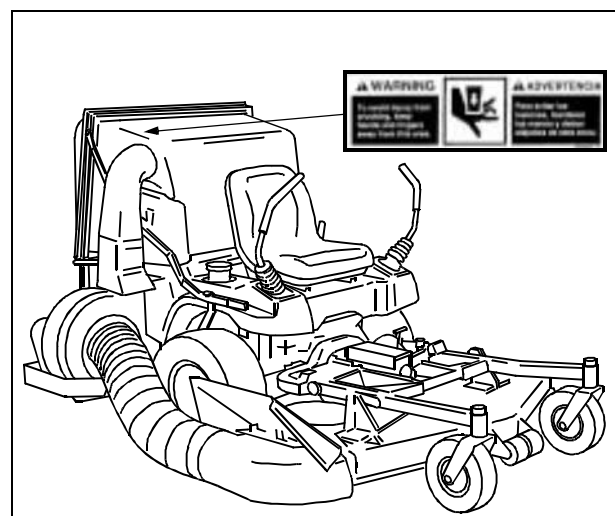

## SAFETY SIGNS


### Warning—Avoid Injury From Fan Blades and Thrown Objects

Avoid injury from fan blades and thrown objects. Remove material collection systems impeller housing, hose and boot when operating vehicle in side discharge mode.

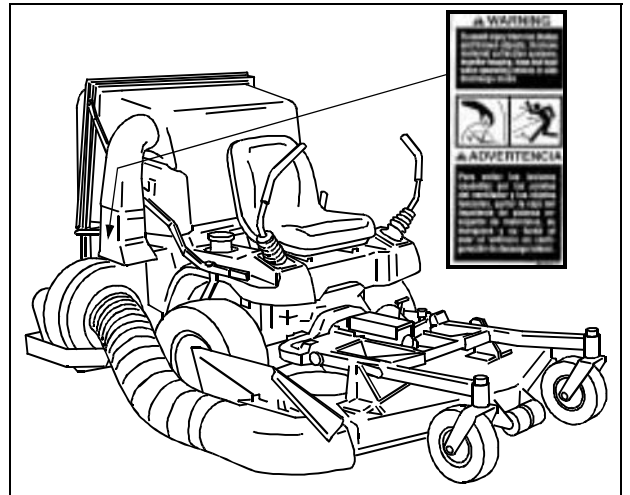


### Caution—Avoid Injury From MCS Handle

To avoid injury, lock handle in position before operating blower or mower.

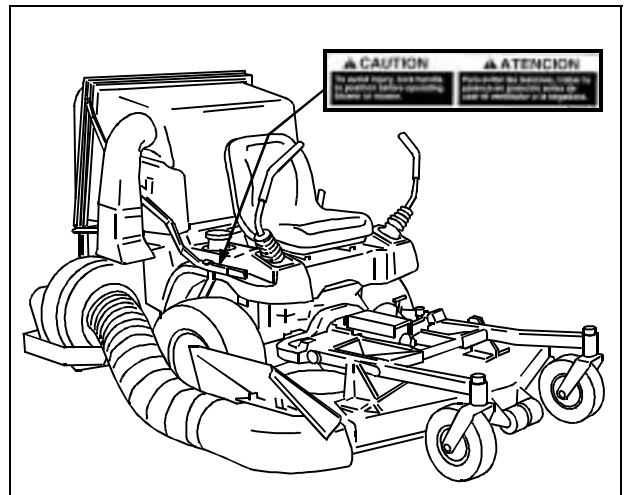

### Warning—Avoid Injury From Rotating Belts


To avoid injury from rotating belts, keep all shields and guard in place.

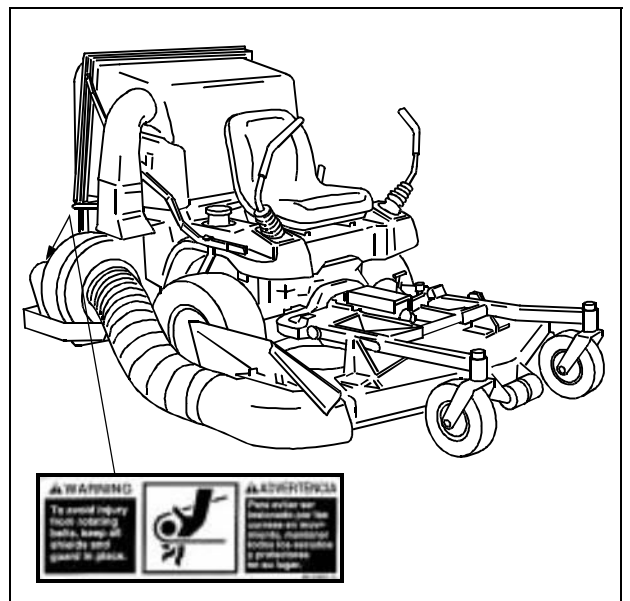

## SAFETY SIGNS


### Warning–Avoid Injury From Fan Blades

To avoid injury from fan blades, Do Not operate blower without chute and hose secured in place.

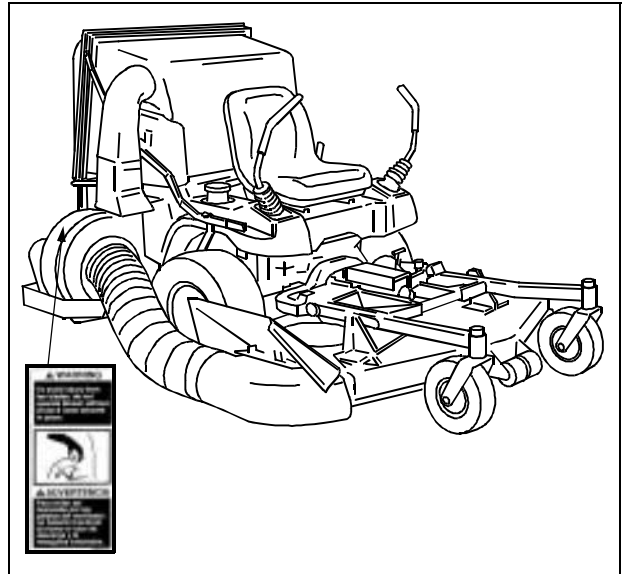


### Warning–Avoid Injury From Thrown Objects

To avoid injury from thrown objects, Do Not operate without hoses securely in place.

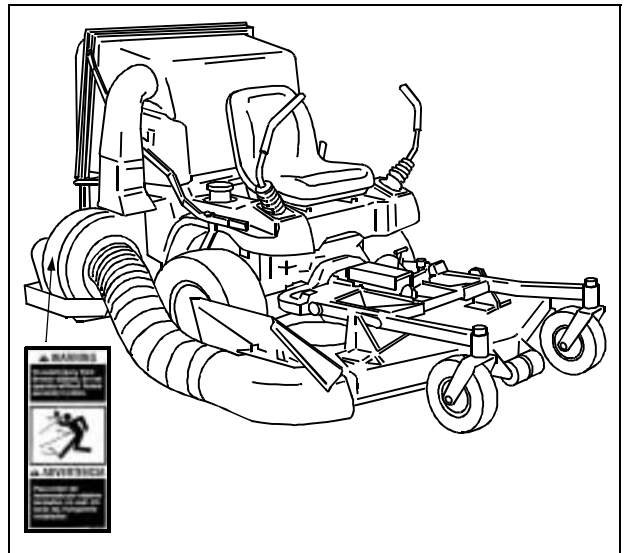

### Warning–Avoid Injury From Thrown Objects

To avoid injury from thrown objects, Do Not operate mower without chutes and hoses securely in place.

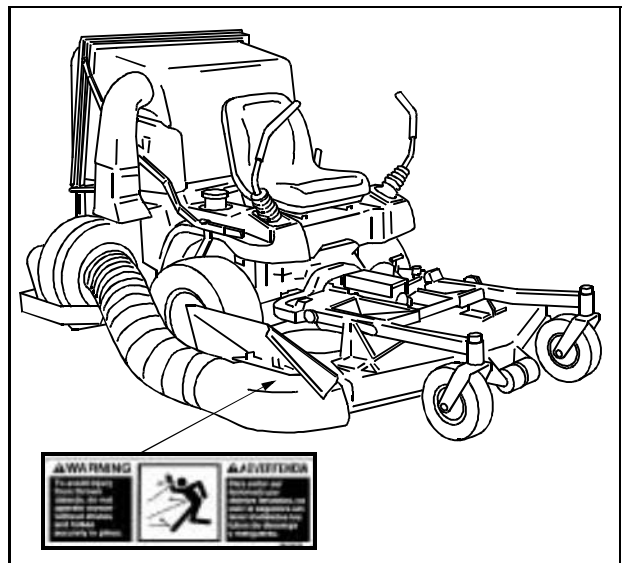


# INSTALLING

## Park Vehicle Safely

- Stop vehicle on a level surface, not on a slope.
- Disengage PTO.
- Engage the park brake.
- STOP the engine.
- Remove the key
- Before you leave the operator's seat, wait for engine and all moving parts to STOP.

## Installing the MCS

1. Park Front Mower on a hard level surface.
2. Stop engine and engage park brake.
3. Remove clevis pins from stored position in the rear frame assembly.
4. Install collection box and frame assembly onto each protruding hex bolt shaft as shown.
  - Insert clevis pin (A) from the top on each side of the rear frame assembly.

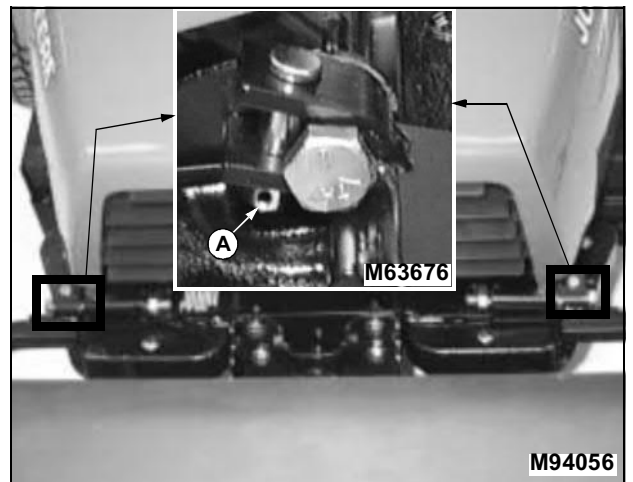

5. Raise and secure Front Mower cowl (B) in the open position. (See **Raising and Lowering Cowling** in the Front Mower operator's manual **Operating Machine** section.)






## INSTALLING


### 6. Install lower dump linkage strap (C).

- Secure strap in position on blower mounting bracket stud (D) with washer (E) and locking ring (F).

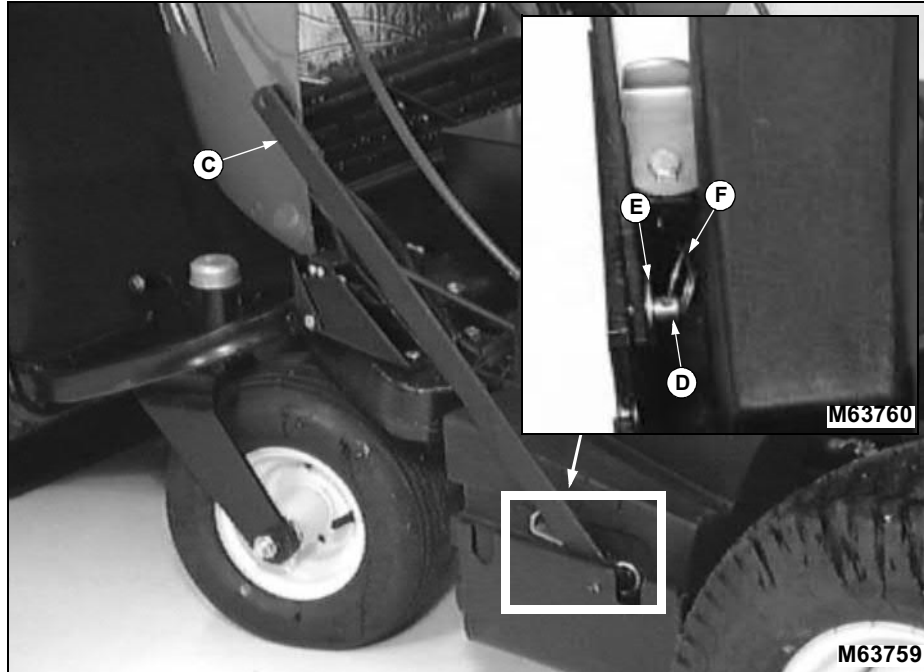

### 7. Install blower onto the Front Mower mounting bracket.

- Round mounting hardware (G) at the bottom of the blower assembly should be inserted into blower support bracket slots.
- Rotate locking clip (H) in position to secure blower to the blower mounting bracket.

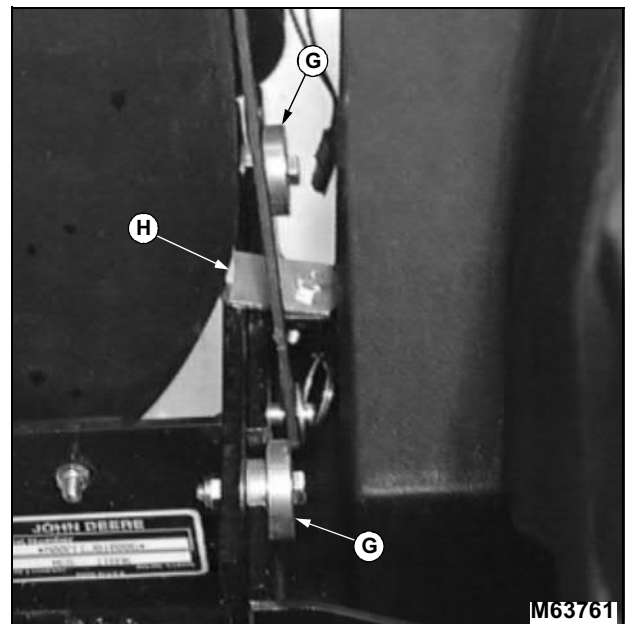

**Thank you very much  
for your reading.**

**Please click here and go  
back to the website.**

**Then, you can  
download the complete  
manual instantly.**

**No waiting.**