



Service Repair Manual

Models

336D and 336D L Excavator

Product: MOBILE HYD POWER UNIT

Model: 336D L MOBILE HYD POWER UNIT M3M

Configuration: 336D & 336D L Mobile Hydraulic Power Units M3M00001-UP (MACHINE) POWERED BY C9 Engine

Disassembly and Assembly

330D, 336D, 336D2, 340D and 340D2 Excavators and 336D MHPU Mobile Hydraulic Power Unit Machine Systems

Media Number -REN8648-30

Publication Date -01/03/2015

Date Updated -15/08/2018

i07188136

Final Drive and Travel Motor - Install

SMCS - 4050-012; 4351-012

Installation Procedure

Table 1

Required Tools			
Tool	Part Number	Part Description	Qty
A	5P-0306	Vacuum Transducer	1
	FT-1115	Vacuum Cap	1
	6V-4142	Fitting	1
	5K-5068	Fitting	1
B	1U-9200	Lever Puller Hoist	1
C	439-3938	Link Bracket	1
D	-	Loctite C5A Copper Anti-Seize	-

Note: Check the O-ring seals for wear or for damage. Replace the O-ring seals, if necessary.

NOTICE

Keep all parts clean from contaminants.

Contaminants may cause rapid wear and shortened component life.

NOTICE

Care must be taken to ensure that fluids are contained during performance of inspection, maintenance, testing, adjusting, and repair of the product. Be prepared to collect the fluid with suitable containers before opening any compartment or disassembling any component containing fluids.

Refer to Special Publication, NENG2500, "Dealer Service Tool Catalog" for tools and supplies suitable to collect and contain fluids on Cat[®] products.

Dispose of all fluids according to local regulations and mandates.

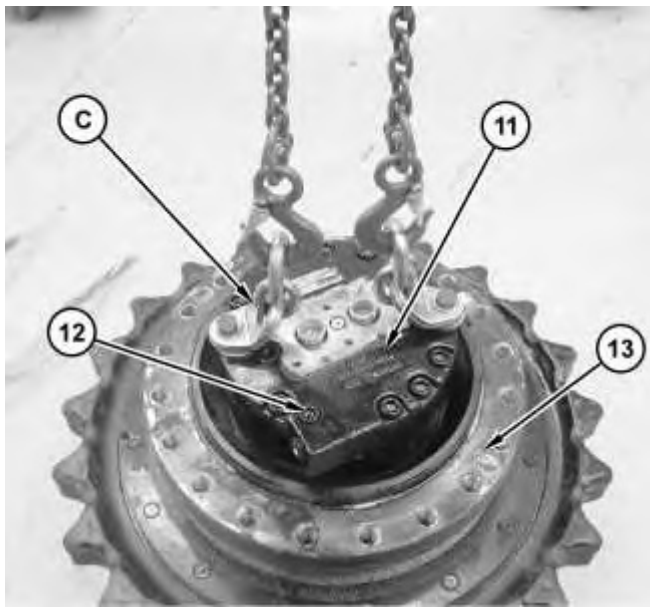


Illustration 1

g01181921

1. Attach Tooling (C) and a suitable lifting device to travel motor (11). The weight of travel motor (11) is approximately 73 kg (160 lb).
 2. Position travel motor (11). Install bolts (12) that mount travel motor (11) to final drive (13).
-

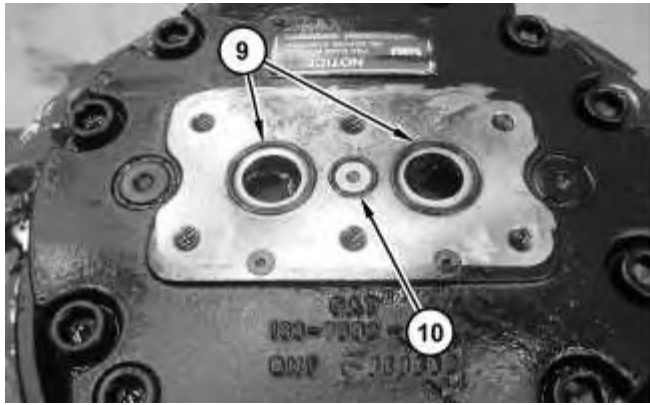


Illustration 2

g01181917

3. Install O-ring seals (10) and (9).

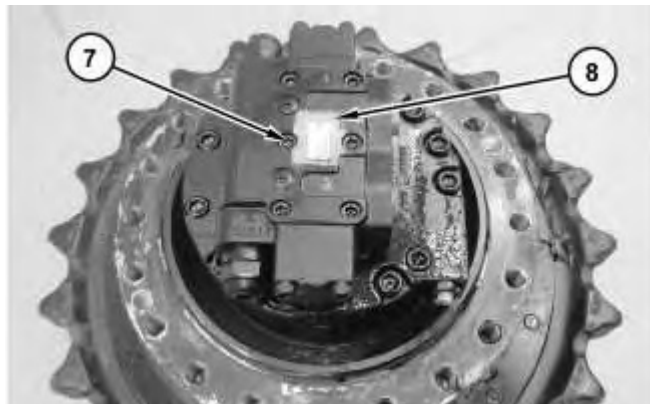


Illustration 3

g01181914

4. Install counterbalance valve (8) and bolts (7).

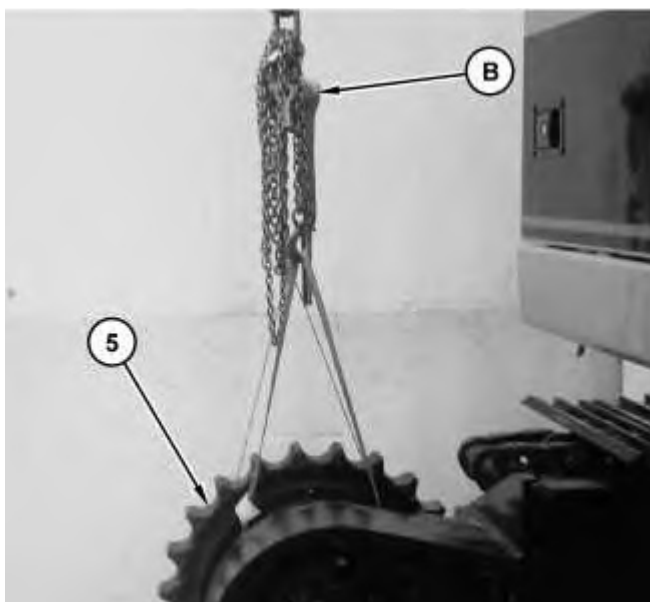


Illustration 4

g01181911

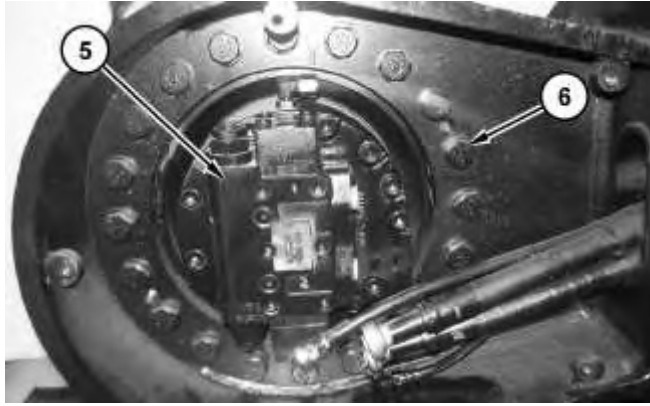


Illustration 5

g01182266

5. Attach Tooling (B) and a suitable lifting device to final drive and travel motor (5). The weight of final drive and travel motor (5) is approximately 860 kg (1896 lb).
6. Carefully position final drive and travel motor (5). Apply Tooling (D) to the threads of bolts (6).
7. Tighten bolts (6) in an alternating sequence to a torque of $250 \pm 25 \text{ N}\cdot\text{m}$ ($184 \pm 18 \text{ lb ft}$). Turn an additional angle of 45 ± 5 degrees. Refer to Service Magazine , M0083843 , "An Improved Bolt Tightening Procedure for the Critical Joints Is Now Used on all Excavators" for more detailed information.

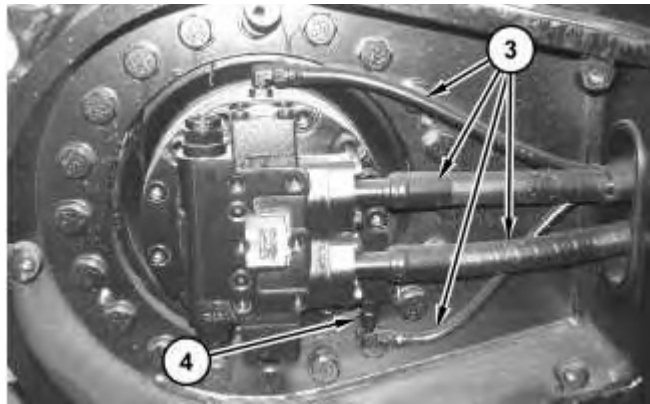


Illustration 6

g01223711

8. Install fitting (4). Connect hose assemblies (3).
-

Thank you so much for reading.
Please click the “Buy Now!”
button below to download the
complete manual.



After you pay.

You can download the most
perfect and complete manual in
the world immediately.

Our support email:

ebooklibonline@outlook.com